



**NILES FENCE & SECURITY
PRODUCTS, LLC.**

SECUREX SUPER C FENCING

8FT HIGH

Fence System: 2 or 3 rail, 93" – 117" OC

Mesh size: 48" w x 96" h

Mesh size: 60" w x 96" h

Mesh panels per section: 2

On Center: 93" – 117"

Securex Fittings (per section):

End Section-End Post

7 Securex End Tensioner w/latch clamp assembly


Corner Section-Corner Post

14 Securex End Tensioner w/latch clamp assembly

Line Section-Line Post

1 Cover Strap (to match line post size)

6 Securex Clamp Bar Sets

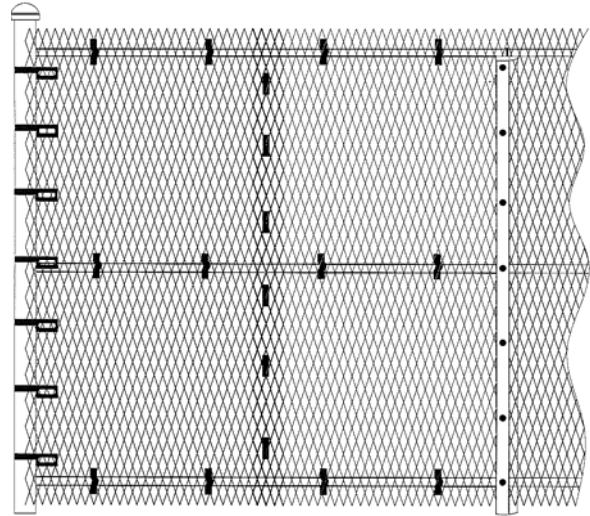

All Sections

48" wide mesh panel - 2 Retro-Fit C-Clamps per mesh section, per rail

60" wide mesh panel - 3 Retro-Fit C-Clamps per mesh section, per rail

6 Securex Bar Clamps (pair)

Securex Framework Requirement:

(strength requirements variable based on mesh choice)

4" OD Terminal Posts (end and corner) with caps

3.25" x 2.50" Super C Line Posts with caps

1.625" x 1.25" Super C top/mid/bottom rail

Notes:

Framework assumes SCH40 or SS40/WT40 round pipe terminals and Super-C (min yield strength 50,000 PSI) line posts and horizontal rails. *Framework size requirements are contingent on mesh choice.*

All mesh is available standard in the following sizes: ¾"-#9R 1"-#7R(.240) 1"-#7R(.300) 1-1/2"-#6R

Expanded metal mesh is hot dip galvanized OR powder coat -Black or Green (custom colors available)

Fasteners – Securex recommends stainless steel nuts with breakaway bolts. Standard carriage bolts should be peened to prevent removal.

All Securex systems assume reverse diamond orientation unless otherwise requested.

Mesh panel size and configuration can be adjusted to design requirements.